



SPECIFICATION

Apex IP68 Tri-Proof



Product Details



Application

- Parking place
- Tunnel / Corridor / Gallery
- Railway / Bus / MTR Station
- Warehouse / Factory
- Chicken Sheds
- Agriculture
- Livestock
- Gas station / Car Washing

Features

- Unique cylinder design, TUV-GS, UL, DLC, CE, RoHs certified
- Protection degree: IP68 IK09
- PC material – UV resistance, high impact resistance,
- PMMA material – Ammonia resistance, corrosion resistance
- 100lm/w or 130lm/w efficiency optional
- Capable with emergency, 0~10V dimming, DALI dimming, Meanwell version
- L80B50(Ta=25°C): 70,000hrs
- 5 years warranty

Temperature

Operating: -20 ~ +50°C



Storage: -40 ~ +85°C



Product Details




Dimension

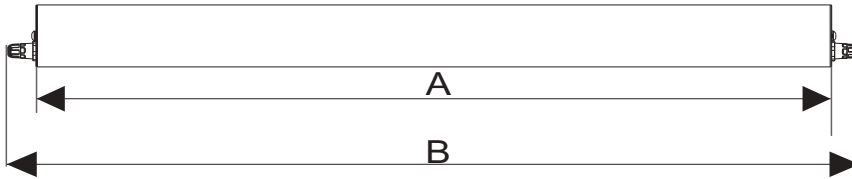

length	A	B		C
——	Min.mm	Min.mm	Max.mm	Min.mm
600	610	700	701	100
1200	1217	1307	1308	100
1500	1517	1607	1608	100



Installation

① Ceiling Mounted Installation

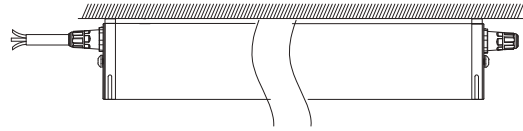

* Ceiling Mounted accessories are NightSnipe configuration


② Hanging Installation

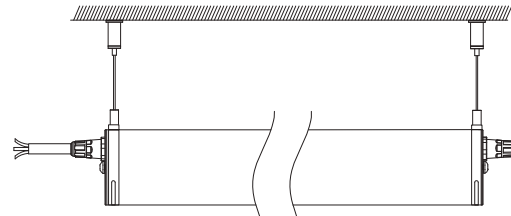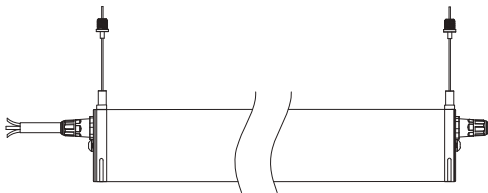

* Suspended accessories need to be paid additionally

Package

Item code	Dimension	Carton Size	N.W.(kg)/PC	G.W.(kg)/PC	Maximum Loading of		
					20'GP	40'GP	40'HQ
NS-IP68-20SL NSA68-2-20W	610*100mm	760*350*245mm	1.5	13	476CTNs	974CTNs	1122CTNs
NS-IP68-30SL NSA68-2-30W	610*100mm	760*350*245mm	1.5	13	476CTNs	974CTNs	1122CTNs
NS-IP68-40SL NSA68-4-40W	1217*100mm	1370*350*245mm	2.2	19	258CTNs	530Tns	628CTNs
NS-IP68-50SL NSA68-5-50W	1217*100mm	1370*350*245mm	2.2	19	258CTNs	530CTNs	628CTNs
NS-IP68-505SL NSA68-5-50WXL	1512*100mm	1670*350*245mm	3.1	25	220CTNs	454CTNs	519CTNs
NS-IP68-60SL NSA68-5-60W	1512*100mm	1670*350*245mm	3.1	25	220CTNs	454CTNs	519CTNs

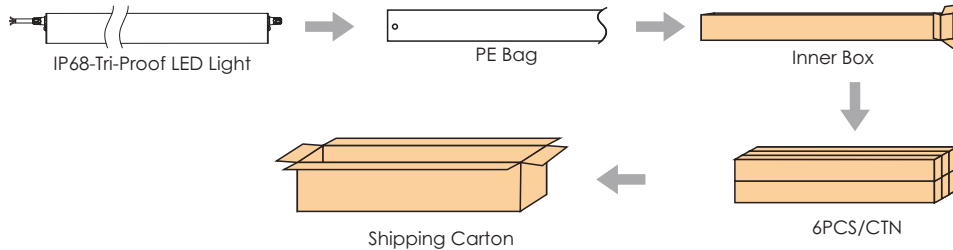

Reminding: 1. Do not install this lamp into water directly to avoid any potential safety risks caused by AC input.

2. Outdoor usage should be installed with shelter.

All the above information is subject to the final interpretation of ShineLong Technology.